


TECHNICAL DATA SHEET

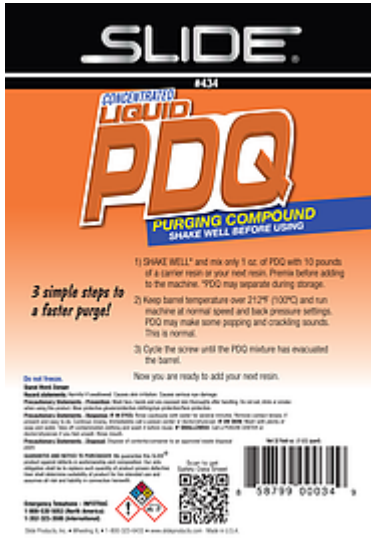

Portable PDQ Purging Compound (50 bags/case) 43401

Product Description

P.D.Q. works with the carrier resin to remove all thermoplastics, and is effective for resin-to-resin and color-to-color changes. It requires no soaking, maximizing production up-time and eliminates the need to keep cracked acrylic purging resin inventory. P.D.Q. lets you purge quickly, easily and safely, and at a fraction of the cost of conventional purges for injection, extrusion or blow molding. Just toss the pre-measured packet in the hopper with your carrier resin and the packet will dissolve during the purge.

Applications

Purging Compound

Unit Package Description

package of 50 1-ounce packets

Generic Description

Purging Compound

Net Weight Fill

1 net ounce per bag

UPC Code

none

Appearance

Off-white Liquid

Odor

Slight Amونيا

Flash Point F

None

Flash Point C

None

Base Type

Water

Evaporation Rate

N/A

HMIS Rating

Not Determined

DOT Proper Shipping Name

Not Regulated, Cleaning Compounds, NOI

Removal

N/A

Units Per Case

50

Case Weight (lbs)

5

Working Temperature F

212 to 450 degrees

Working Temperature C

100 to 232 degrees

Propellant

N/A

NFPA Aerosol Flammability Level

N/A

