


TECHNICAL DATA SHEET

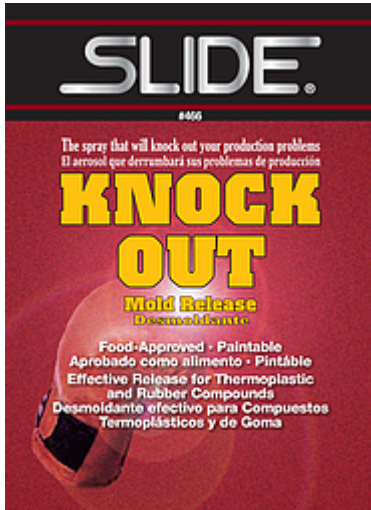

Knock Out Mold Release Bulk/Liquid 46601PB, 46605PB, 46655PB

Product Description

Knock Out gets "sticky parts" cleanly out of the mold and is approved for indirect food contact. It imparts a light, dry coating that is amazingly effective, working for several cycles without re-application. Paintable formulation.

Applications

Mold Release

Unit Package Description

1, 5 and 55-gallon containers

Generic Description

Paintable Mold Release

Approx. Net Weight Fill per Gal.

6 pounds

Net Weight Fill

1 - 55 gallons

Appearance

Clear Oily Colorless Liquid

Odor

Mild, Petroleum-like

Flash Point F

25 degrees

Flash Point C

Negative 4 degrees

Base Type

Propylene Glycol

Evaporation Rate

Fast

HMIS Rating

2, 3, 0, X

DOT Proper Shipping Name

UN1206, Proper Shipping Name - Heptanes Solution, Hazard Class - 3, Packing Group - II

VOC % (Federal)

96.67

VOC g/L (Federal)

683.99

VOC lbs./Gal (Federal)

5.71

Removal

Remove with organic or hydrocarbon solvents

Food Safety Citation (CFR)

21CFR 178.3570

Units Per Case

1

Case Weight (lbs)

Various

Working Temperature F

32 to 450 degrees

Working Temperature C

0 to 232 degrees

Specific Gravity

0.698

