


TECHNICAL DATA SHEET

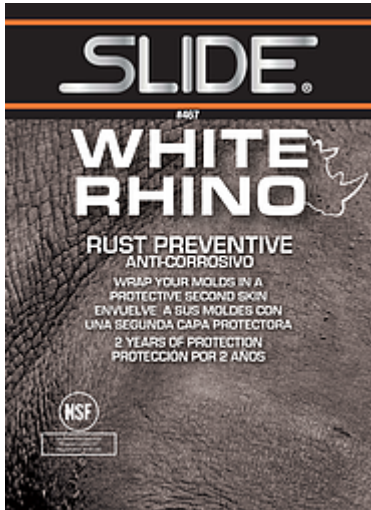

White Rhino Rust Preventive Bulk/Liquid 46701PB, 46705PB, 46755PB

Product Description

White Rhino Rust Preventive is Slide's answer to processors looking for a great, NSF-certified rust preventive for their mold assemblies and machinery that produce food packaging. Its fast-drying formulation sets up quickly to protect immediately against moisture and light acids. It is self-cleaning in startup which saves time and money. White Rhino offers up to 2-years corrosion protection under normal indoor storage conditions.

Applications

Rust Preventive

Unit Package Description

1, 5 and 55-gallon containers

Generic Description

Rust Preventive

Approx. Net Weight Fill per Gal.

6 pounds

Net Weight Fill

1 - 55 gallons

Appearance

Brownish-Tint Liquid

Odor

Mild, Petroleum like

Flash Point F

25 degrees

Flash Point C

Negative 4 degrees

Base Type

Petroleum

Evaporation Rate

Slow

HMIS Rating

2, 3, 0, X

DOT Proper Shipping Name

UN1206, Proper Shipping Name - Heptanes Solution, Hazard Class - 3, Packing Group - II

VOC % (Federal)

81

VOC g/L (Federal)

887.91

VOC lbs./Gal (Federal)

7.41

Removal

Remove with organic or hydrocarbon solvents

Food Safety Citation (CFR)

NSF H1

Units Per Case

1

Case Weight (lbs)

Various

Working Temperature F

32 to 350 degrees

Working Temperature C

0 to 176 degrees

Specific Gravity

0.698

